

Wellstar Information Technology

Setting up a Remote Laptop

Table of Contents

Symbols in this Document 2

1 Overview 3

1.1 Hardware Included 3

1.2 Tour of the Laptop PC 3

 1.2.1 Front 3

 1.2.2 Keyboard Surface 4

 1.2.3 Right Side 5

 1.2.4 Left Side 5

 1.2.5 Bottom 6

1.3 Set up the Laptop 7

1.4 Set up the Docking Station 7

1.5 Set up the External Monitor(s) 8

1.6 Connect Monitor(s) to the Docking Station 9

2 Set Up Two-Factor Authentication (2FA) on your Mobile Device 11

2.1 Obtain a Microsoft Authenticator Mobile App Credential 11








2.2 Computer Setup 12

2.3 Configure your Mobile Device 12

3 Connect to Wellstar’s Virtual Private Network (VPN) 14

Symbols in this Document

Graphic symbols indicate the following type of notes:

	Note	A general note about what is happening
	Tip	Useful information related to the activity
	Shortcut	Indicates a shortcut or alternative method
	Exclamation	Important action, caution, or warning.
	Reminder	Information to remember
	Reference	Directs you to another page or resource
	Contact	Directs you to a telephone contact


1 Overview

1.1 Hardware Included

- Laptop with charging cable
- HDMI cable
- One monitor, including power cord and VGA cable
- Wireless keyboard and mouse combination
- If needed:
 - Display cable to connect a second monitor
 - Display adapter to connect a monitor. *Only for monitors that do not have an HDMI port compatible with the laptop's HDMI port.*


1.2 Tour of the Laptop PC

1.2.1 Front

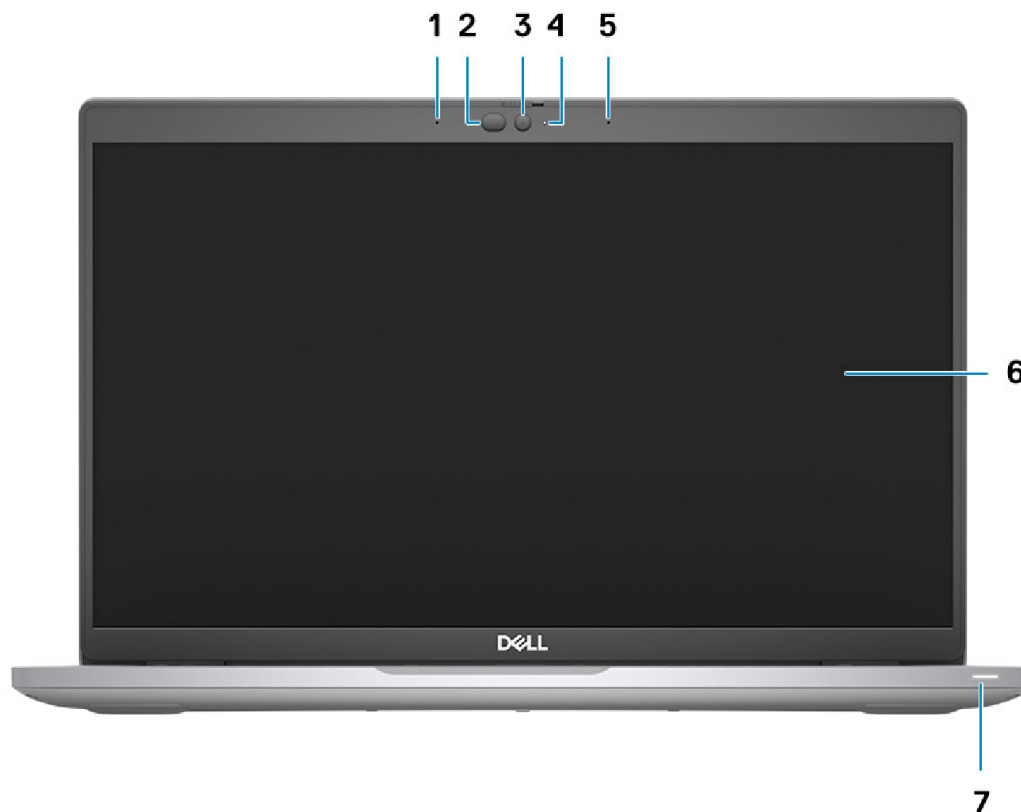


- | | |
|--------------------------------------|---------------------------------|
| 1. Dual array microphone | 5. Dual array microphone |
| 2. IR emitter / ambient light sensor | 6. Display panel |
| 3. Camera | 7. Battery diagnostic LED light |
| 4. Camera status LED light | |

1.2.2 Keyboard Surface

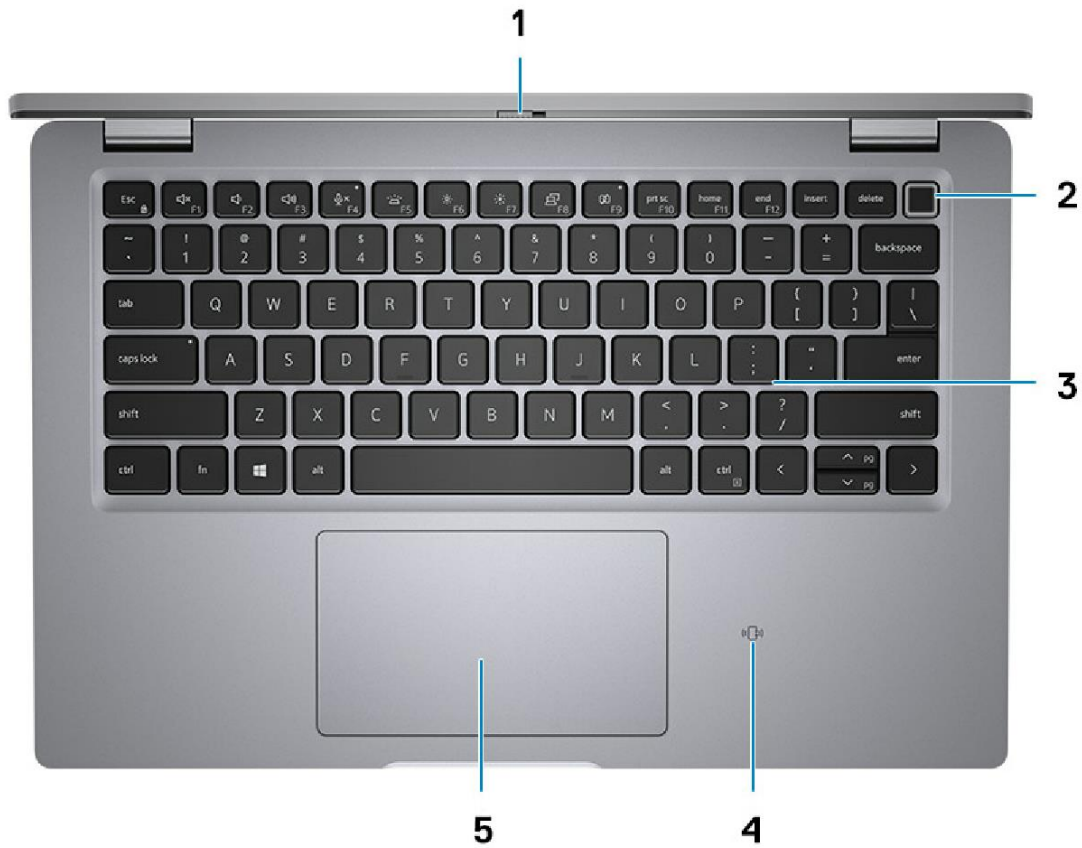


1. Privacy shutter
2. Power button
3. Keyboard
4. NFC / Contactless smart card reader
5. Clickpad

1.2.3 Right Side

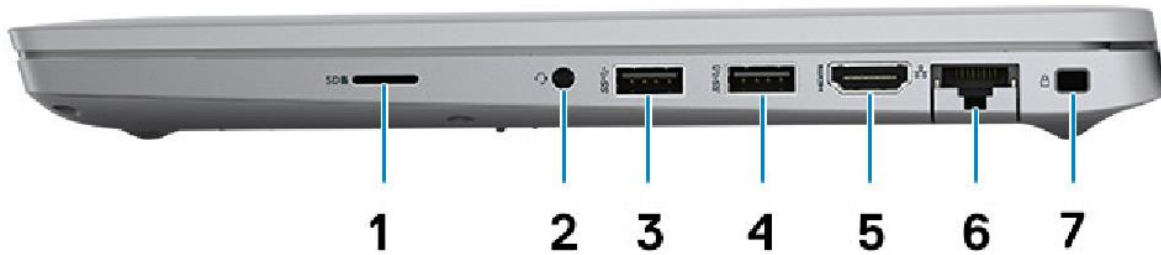


- | | |
|--|-------------------------------|
| 1. MicroSD card slot | 5. HDMI port |
| 2. Audio port (for headphones or speakers) | 6. Ethernet port |
| 3. USB port | 7. Slot for wedge-shaped lock |
| 4. USB port with PowerShare | |

1.2.4 Left Side

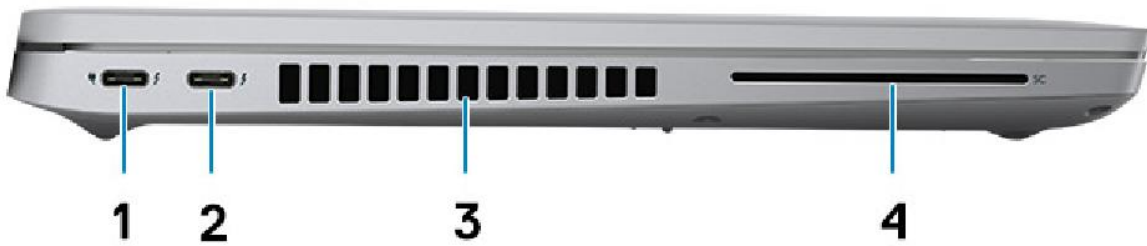

1. USB 4 port (use for power or docking station)
2. USB 4 port (use for power or docking station)
3. Air vents
4. Smart card reader slot

1.2.5 Bottom

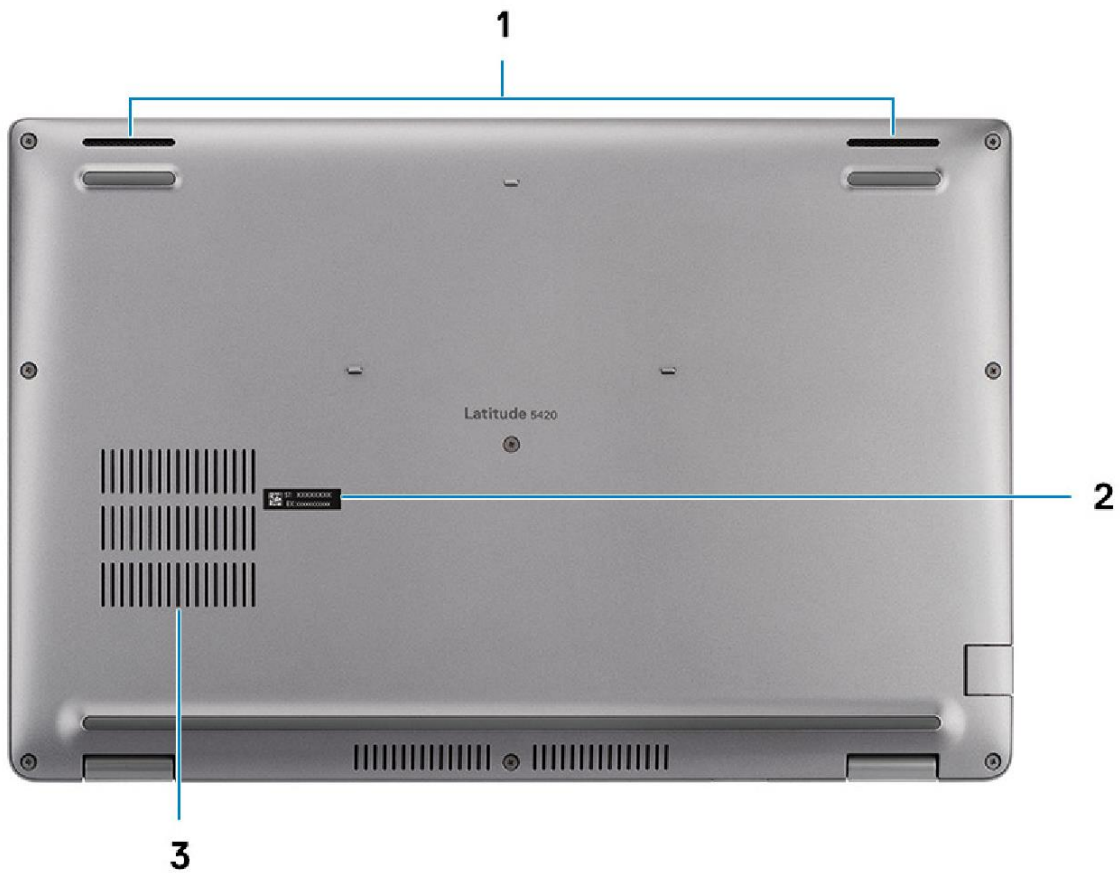

1. Speakers
2. Service tag label
3. Air vent


1.3 Set up the Laptop




1. Connect the power cable to the transformer and plug the other end into an electrical outlet.
2. Plug the USB end of the power cord into the left side of the PC.

1.4 Set up the Docking Station


1. Connect the power cable to the transformer and plug the other end into an electrical outlet.
2. Plug the round end of the power cord into the side of the dock.

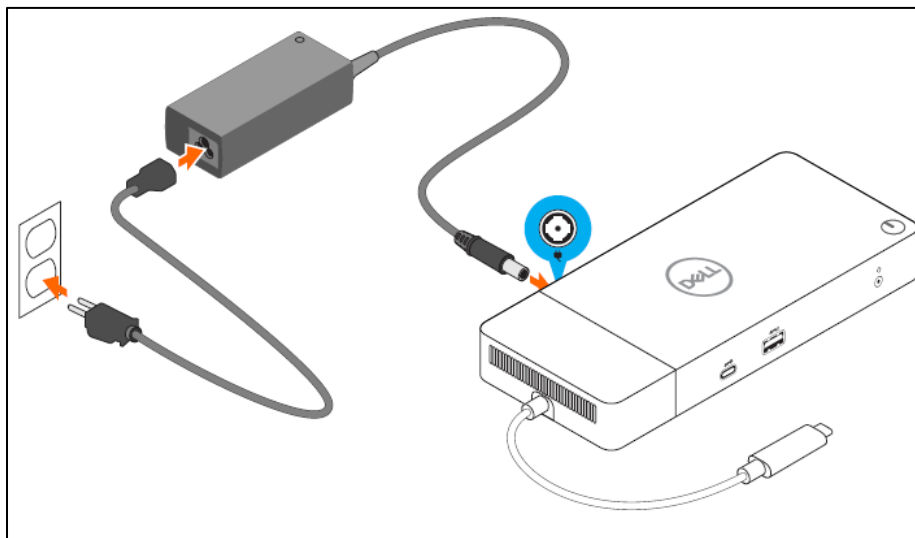

3. Connect the cord at the end of the dock to the USB4 port on the left side of the laptop.

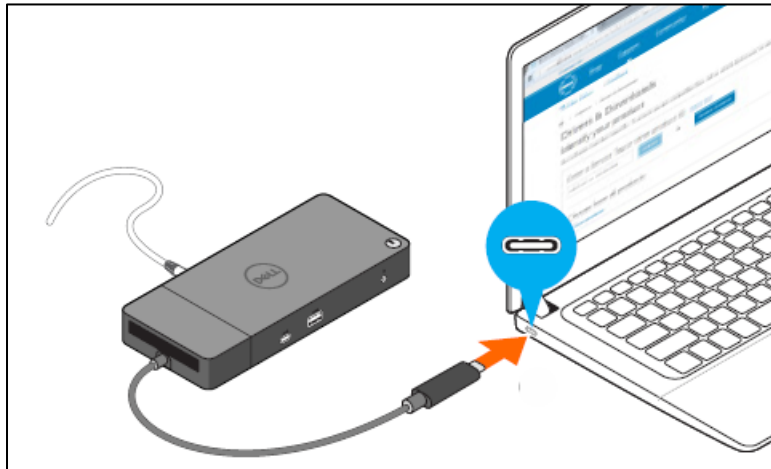

4. Connect the keyboard and mouse to the docking station USB ports.

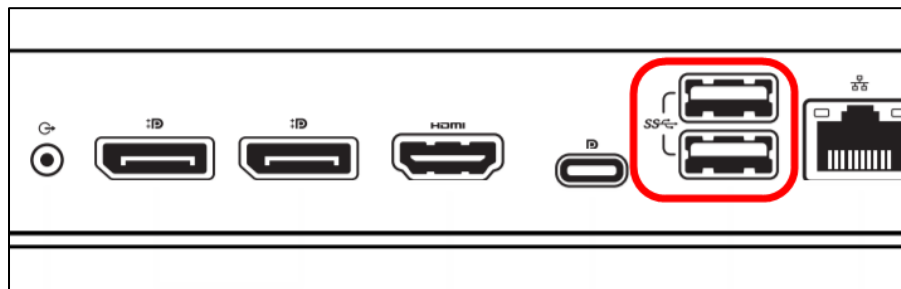

1.5 Set up the External Monitor(s)

1. Remove the monitor from the box and assemble the stand per the included instructions.
2. Connect the power cable included with the monitor to the power port on the back of the monitor:

The back of your monitor should look similar to this one. The power connector for the monitor is circled below.







3. Connect the female end (circled below) of the power cable to the monitor.




4. Plug the other end of the power cable into an electrical outlet.

1.6 Connect Monitor(s) to the Docking Station


1. Connect one end of the HDMI cable OR display port cable to the back of the monitor.
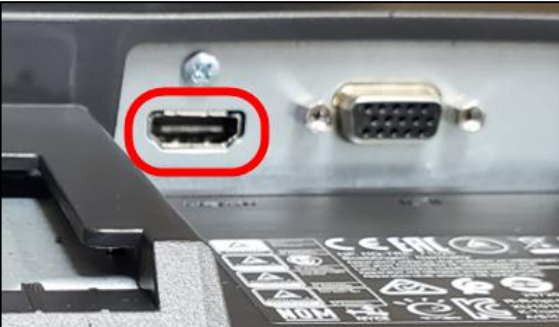
<p>HDMI cable. Notice the indents at both corners of the connectors.</p> 	<p>Display port cable. Notice that only one corner is indented on each connector.</p> 
<p>Monitor HDMI port:</p> 	<p>Monitor display port:</p> 

2. Connect the other end to either HDMI or display port on the side of the dock.

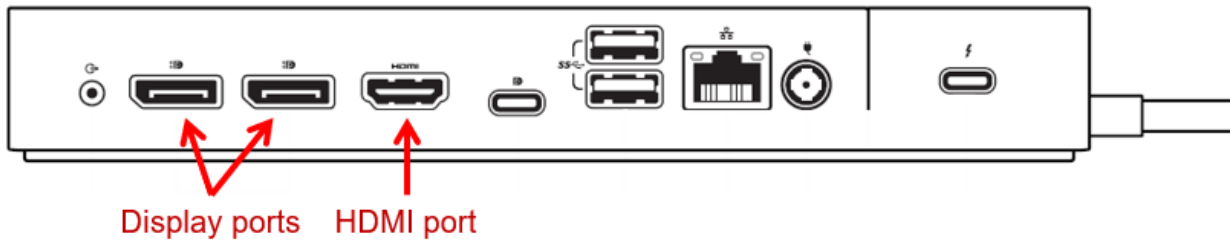

3. Turn on the monitor(s).
4. Turn on the laptop using the power button on the docking station.

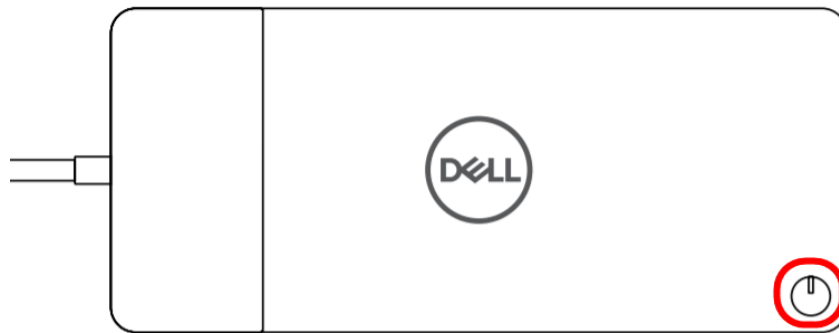

With all peripherals connected to the dock, the monitors should connect automatically.



*To change the primary monitor in Windows, right-click in the middle of the Windows desktop and select **Display Settings**.*

2 Set Up Two-Factor Authentication (2FA) on your Mobile Device

Purpose:	The Microsoft Authenticator service is a comprehensive solution, providing increased security for WellStar Health System (WHS) computer applications and better protection for end users who are interacting online against identity theft.
-----------------	---

2.1 Obtain a Microsoft Authenticator Mobile App Credential

Prerequisites:	<p>Apple (iPhone, iPad, or iPod Touch) requires the following:</p> <ul style="list-style-type: none"> • iOS 16.7 or later • iPhone model 8 or higher <p>Android requires Android O/S 8.0 and up</p>
-----------------------	---

- Using your phone or tablet camera, scan the QR code below for your device. *The app store opens and displays Microsoft Authenticator.*



- Tap **Install** (Android) or **Get** (Apple).
- Select **Allow notifications for this app**. *This allows the app to automatically send a notification without having to open the app each time.*



If this is the first time you are registering a Microsoft product with Wellstar on your phone, you are prompted to create a 6-digit PIN or biometric scan (if available on your device).

2.2 Computer Setup

1. On your PC browser, go to: <http://www.aka.ms/mfasetup>.
2. Enter your Wellstar email address and click **Next**.




If you are asked for a 6-digit PIN or biometric scan OR cannot continue, contact the Service Desk to re-register.




3. Enter your network password and click **Sign in**.
4. Click **Next** twice.

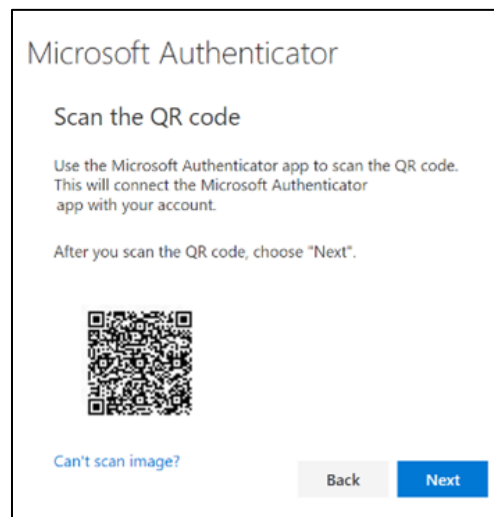

When the QR code displays (see below), do NOT click  until you have completed the steps in section 2.3 below.



2.3 Configure your Mobile Device


1. Open Authenticator .
2. Tap  if it's visible. Otherwise, click  in the upper right corner.




If you have a non-Wellstar account in Authenticator already, adding your Wellstar account does not affect it.

3. Tap **Work or school account**.
4. Tap **Scan a QR code**.
5. With your mobile device, scan the QR code that appears on the computer screen.


- On the computer, click **Next**. *MS Authenticator App sends a test notification to your mobile device.*

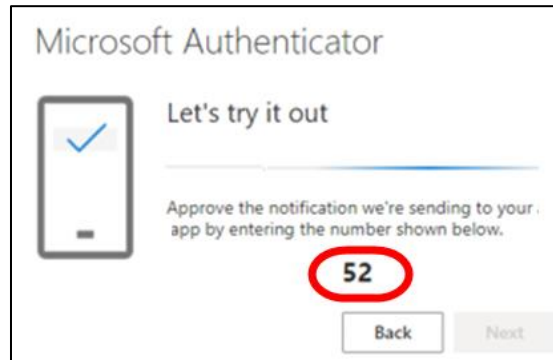

- Note the 2-digit number displayed on the computer screen.

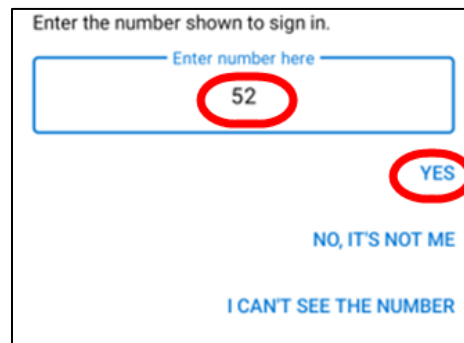

- Enter the 2-digit number displayed on the computer and tap **YES**.
On successful completion, the computer displays this message:

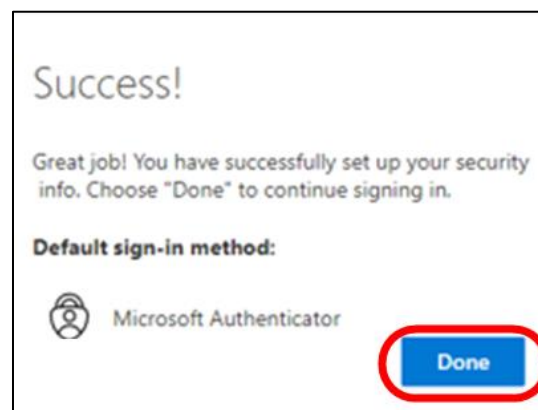

- Tap **Done**.




Applications on your phone that were active with Symantec VIP may disconnect and require you to reconnect using Microsoft Authenticator.

3 Connect to Wellstar's Virtual Private Network (VPN)


1. Turn on the PC.



2. Press **Ctrl-Alt-Del** keys simultaneously.

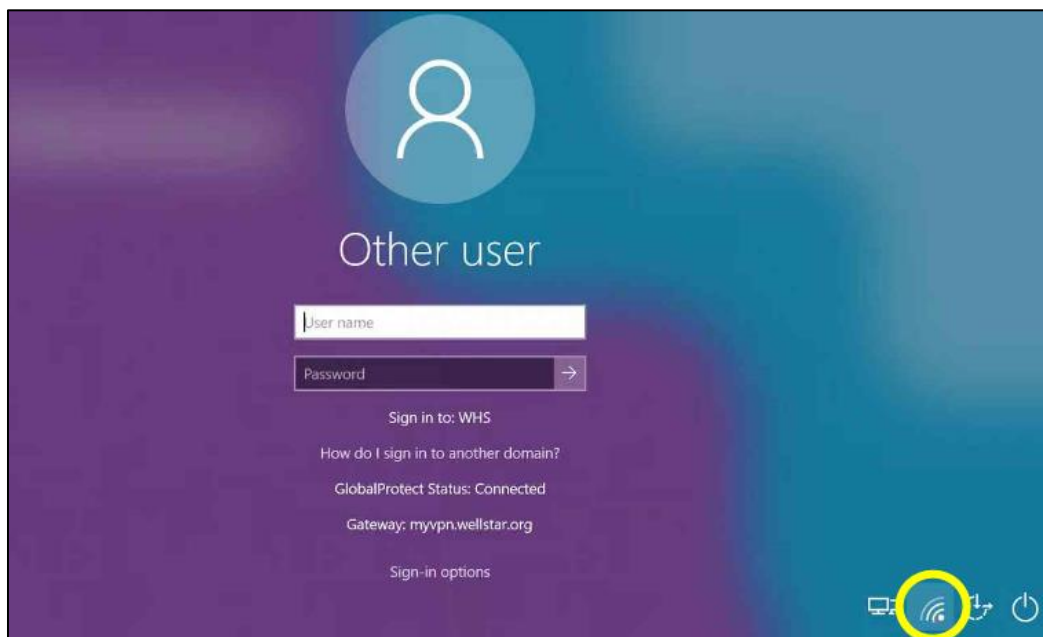

3. Click  (WIFI connection) in the lower right corner.

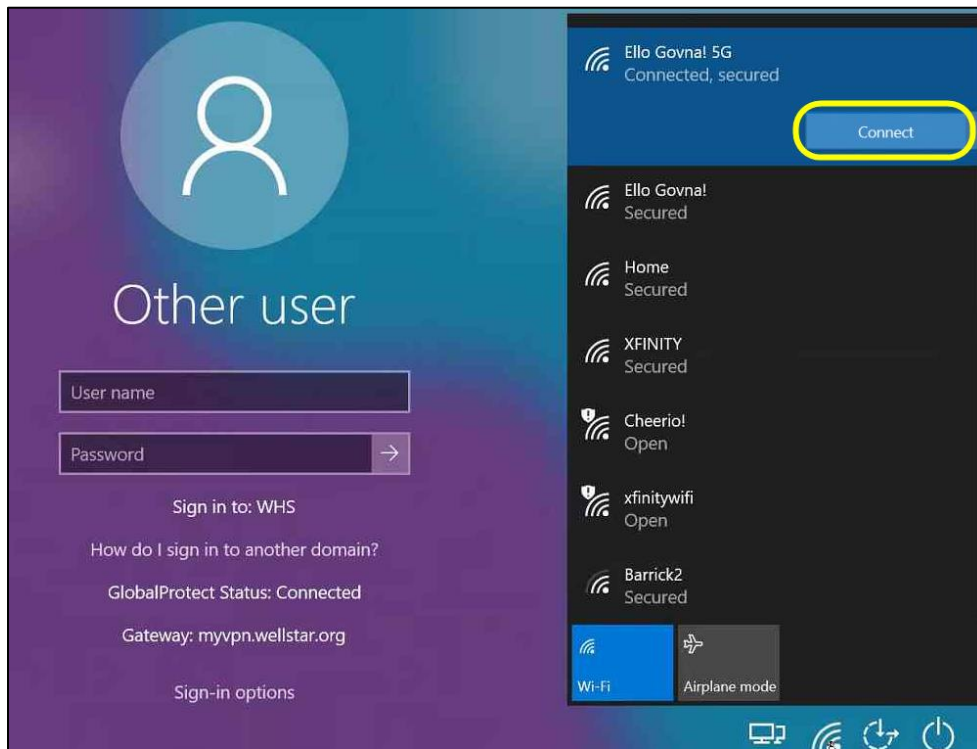

- Select your home WIFI and click .

The GlobalProtect Status changes to **Connected**:




- Fill in the fields as follows:


Field	Description
Username	Enter your WellStar employee ID.
Password	Enter your WellStar network password.

6. Press **Enter**.


The Welcome screen displays:

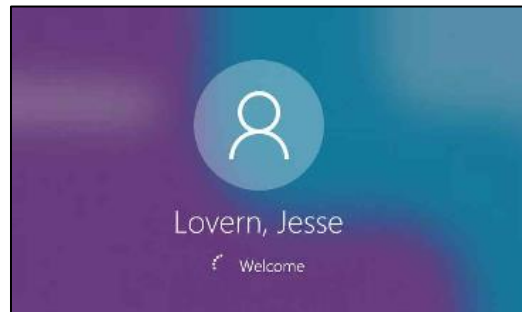

Upon successful login, this screen displays:

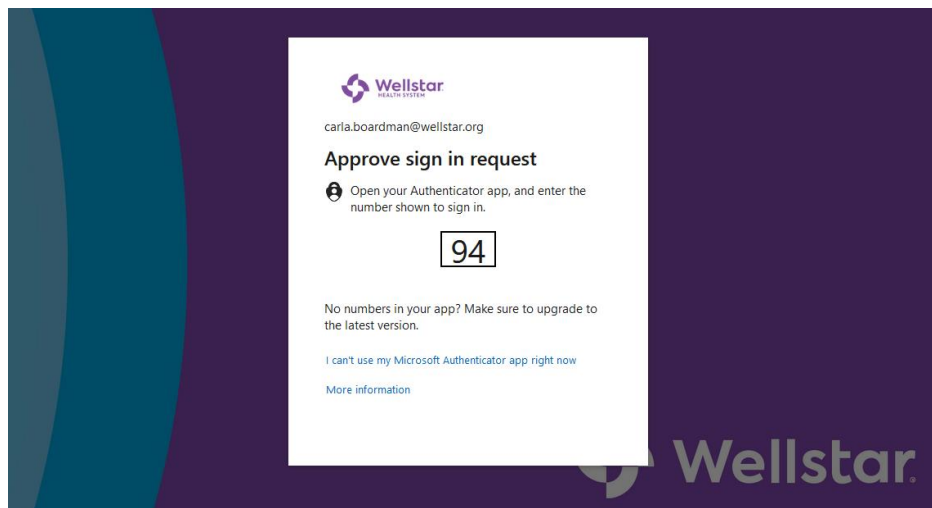

Authenticator on your mobile device prompts you for the 2-digit passcode:

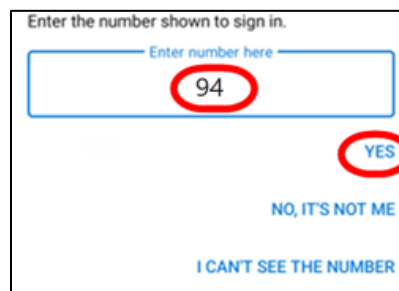

7. Enter the 2-digit number displayed on the work device and tap **YES**.



You are not required to sign into GlobalProtect again after Windows starts. GlobalProtect uses your Windows credentials to sign in, so you just need to verify the login on your mobile device (step 7 above).

Publication and Revision

Previous Version	N/A	Authored by	Carla Boardman
Effective date	8/22/24	Revised by	N/A
To review date	2/22/24	Authorized by	RJ Hubbard David Meniffee Dave McMillan
Document #	418	Approved by	Brandon Lester Jesse Lovern Devin Studstill
Record location	SharePoint: IT Documentation Library → End User Documentation → Hardware Setup Click here to access location		
Remarks (if any)			